

※NOTES※



MECHANICAL

- ① HOUSING : THERMOPLASTIC-NYLON 6/6, UL94V-0, BLACK
- ② CONTACT : PHOSPHOR BRONZE, TIN PLATED OVER NICKEL


SPECIFICATION

- ① DIELECTRIC WITHSTANDING VOLTAGE : 500V DC
- ② DURABILITY : 50 CYCLES MIN.
- ③ CONTACT RESISTANCE : 30 MILLIOHMS
- ④ OPERATION TEMPERATURE : -55°C ~ +105°C
- ⑤ WAVE-SOLDERING TEMPERATURE : 250°C FOR 5 SECONDS

※※ THIS PRODUCT IS DESIGNED FOR 3V. LITHIUM COIN BATTERY USE.  
 ※※ THIS IS A RoHS COMPLIANT PRODUCT.

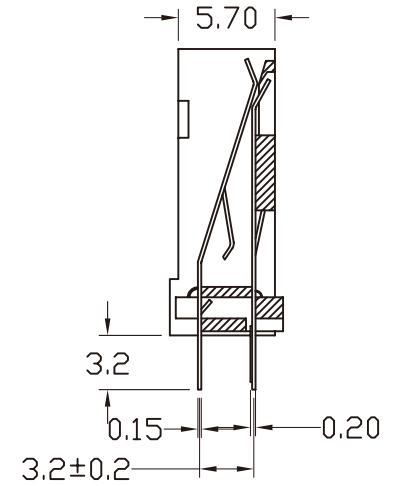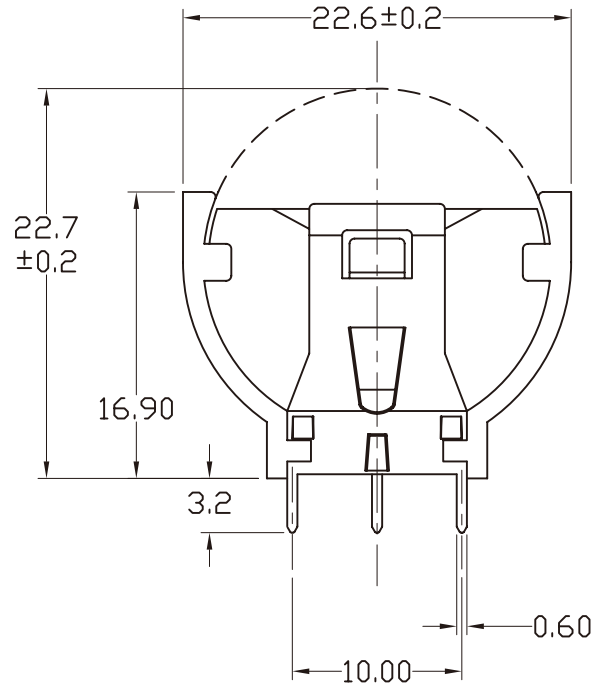

"-" ELECTRODE

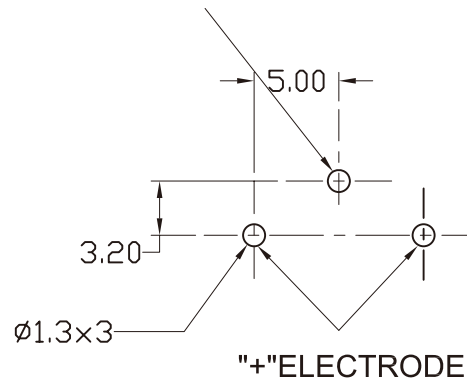

"+" ELECTRODE

RECOMMENDED P.C.B. LAYOUT  
(TOP VIEW)

QUALITY CONTROL LINE DIMENSIONS SHALL MARKED THE SYMBOL AS ▲ RoHS COMPLIANT HIF COMPLIANT LEAD-FREE	<b>METRIC</b>		WIROS Electronics Int'l CO., Ltd.	
	DRAWER		NOTICE OF PROPRIETARY PROPERTY: THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO WIROS ELECTRONICS INTERNATIONAL COMPANY LIMITED. AND SHOULD NOT BE USED WITHOUT WIROS'S WRITTEN CONSENT.	
	APPROVER		TITLE	
	DIMENSIONS ARE IN MILLIMETERS TOLERANCES		PRODUCT NUMBER	
X. ----- X.X ±0.35 X.XX ±0.25 X.XXX ±0.15 ANGLES ±3°		VERTICLE BATTERY 3 PINS, CONNECTOR (FOR LITHIUM COIN BATTERY USE)		
DO NOT SCALE DRAWINGS		THIRD ANGLE PROJECTION		
SIZE	REV.	SCALE	SHEET 1 OF 1	
A4		NONE		