

* NOTES * (UNLESS OTHERWISE SPECIFIED)

MECHANICAL

- ① HOUSING : THERMOPLASTIC NYLON 6/T, UL94V-0
- ② CONTACT : PHOSPHOR BRONZE, 0.64mm SQUARE

SPECIFICATION

- ① CURRENT RATING : 3 AMPHERES MAX.
- ② WITHSTANDING VOLTAGE : 1000V AC/DC
- ③ INSULATION RESISTANCE : 1000 MEGOHMS MIN.
- ④ CONTACT RESISTANCE : 20 MILLIOHMS MAX.
- ⑤ OPERATING TEMPERATURE : -40°C TO +105°C
- ⑥ WAVE SOLDERING PEAK-TEMP. : 260±5°C FOR 3 SECONDS





*** THIS IS A RoHS-2 RECOGNIZED PRODUCT

ORDER OPTION(S)

PHDJ1-3 ☒ JP1X ☒☒ P1

NO. OF POSITIONS
01~40

HOUSING COLOR
1~BLACK 3~WHITE
4~GREEN 6~ORANGE
7~RED A~BLUE

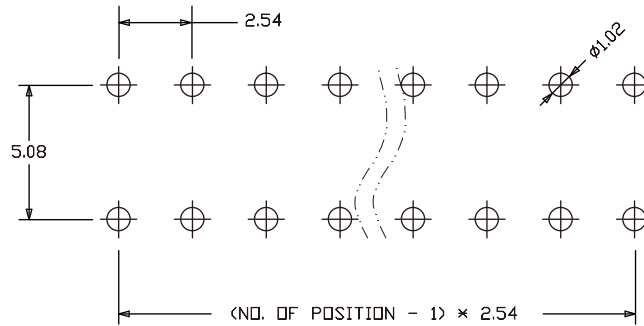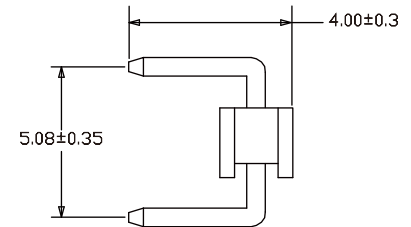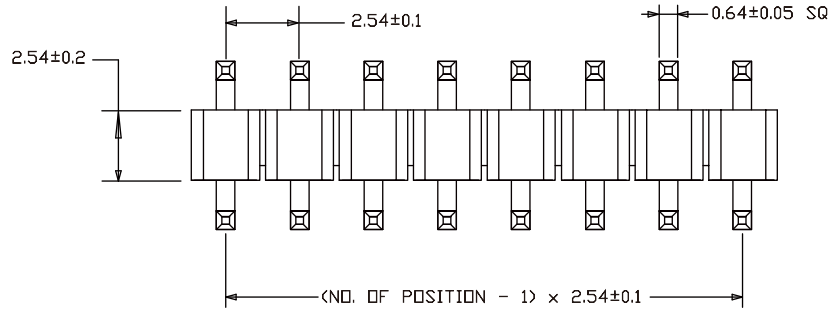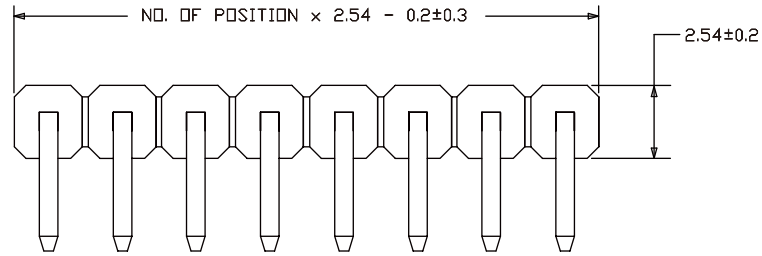

RECOMMENDED P.C.B. LAYOUT
(TOP VIEW)
TOLERANCE ±0.05mm

QUALITY CONTROL DIMENSIONS SHALL MARKED THE SYMBOL AS ▲ RoHS COMPLIANT HTP COMPLIANT LEAD-FREE	METRIC		WIROS ELECTRONICS INTERNATIONAL COMPANY LIMITED	
	DRAWER VIVIAN W.		NOTICE OF PROPRIETARY PROPERTY THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO WIROS ELECTRONICS INTERNATIONAL COMPANY LIMITED AND SHOULD NOT BE USED WITHOUT WRITTEN CONSENT FROM WIROS.	
	APPROVER STAR H.			
	DIMENSIONS ARE IN MILLIMETERS TOLERANCES X. ----- X.X ----- X.XX ----- X.XXX ----- ANGLES ±3°		TITLE 2.54 LOW PROFILE SINGLE ROW HEADER JUMPER CONNECTOR	
DO NOT SCALE DRAWINGS THIRD ANGLE PROJECTION		PRODUCT NUMBER PHDJ1-3×JP1X☒☒P1		
SIZE A4	REV.	SCALE NONE	SHEET 1 OF 1	