

\* NOTES \* (UNLESS OTHERWISE SPECIFIED)

MECHANICAL

- 1 HOUSING : THERMOPLASTIC NYLON 6/T, UL94V-0
- 2 CONTACT : PHOSPHOR BRONZE, 0.50mm SQUARE

SPECIFICATION

- 1 CURRENT RATING : 2 AMPHERES MAX.
- 2 VOLTAGE RATING : 250V
- 3 WITHSTANDING VOLTAGE : 500V AC/MINUTE
- 4 INSULATION RESISTANCE : 1000 MEGOHMS MIN.
- 5 CONTACT RESISTANCE : 20 MILLIOHMS MAX.
- 6 OPERATING TEMPERATURE : -40°C TO +105°C
- 7 WAVE SOLDERING PEAK-TEMP. : 250±5°C FOR 3 SECONDS





\*\*\* THIS IS A RoHS-2 RECOGNIZED PRODUCT

ORDER OPTION(S)

PHDJ7-3  JP1X  M1

NO. OF POSITIONS  
01~40  
-----

HOUSING COLOR  
1~BLACK 3~WHITE  
4~GREEN 6~ORANGE  
7~RED A~BLUE  
-----

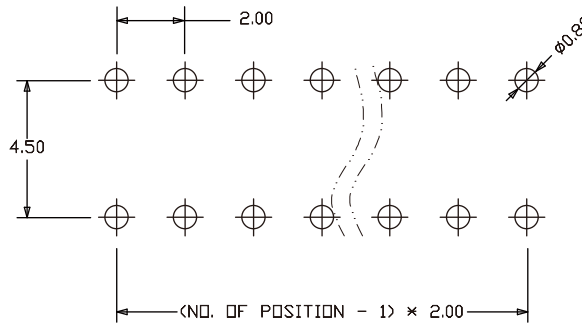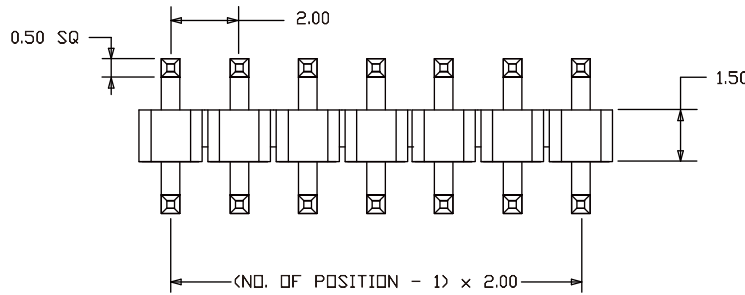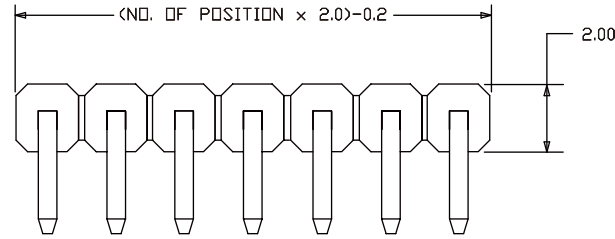

RECOMMENDED P.C.B. LAYOUT  
(TOP VIEW)  
TOLERANCE ±0.05mm

REV. DATE	DESCRIPTION

QUALITY CONTROL DIMENSIONS SHALL MARKED THE SYMBOL AS <input checked="" type="checkbox"/> RoHS COMPLIANT <input type="checkbox"/> HTP COMPLIANT <input type="checkbox"/> LEAD-FREE	<b>METRIC</b>		WIROS ELECTRONICS INTERNATIONAL COMPANY LIMITED	
	DRAWER VIVIAN W.		NOTICE OF PROPRIETARY PROPERTY THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO WIROS ELECTRONICS INTERNATIONAL COMPANY LIMITED AND SHOULD NOT BE USED WITHOUT WRITTEN CONSENT FROM WIROS.	
	APPROVER STAR H.			
	DIMENSIONS ARE IN MILLIMETERS TOLERANCES X. ----- X.X ±0.30 X.XX ±0.15 X.XXX ----- ANGLES ±3°		TITLE  <b>2.00 LOW PROFILE SINGLE ROW HEADER JUMPER CONNECTOR</b>	
DO NOT SCALE DRAWINGS THIRD ANGLE PROJECTION		PRODUCT NUMBER PHDJ7-3*JP1X**M1		
SIZE <b>A4</b>	REV.	SCALE NONE	SHEET 1 OF 1	