

※NOTES※


MECHANICAL

- ① HOUSING : THERMOPLASTIC NYLON/6T, BLACK, UL94V-0
- ② CONTACT : BRASS, SQ=0.5mm






SPECIFICATION

- ① CURRENT RATING : 1.5 AMPHERES
- ② WITHSTANDING VOLTAGE : 500V AC
- ③ INSULATION RESISTANCE : 1000 MEGOHMS MIN.
- ④ CONTACT RESISTANCE : 20 MILLIOHMS MAX.
- ⑤ OPERATING TEMPERATURE : -40°C~+85°C
- ⑥ MAX PROCESSING TEMPERATURE : 260°C FOR 10 SECONDS


ORDER OPTION

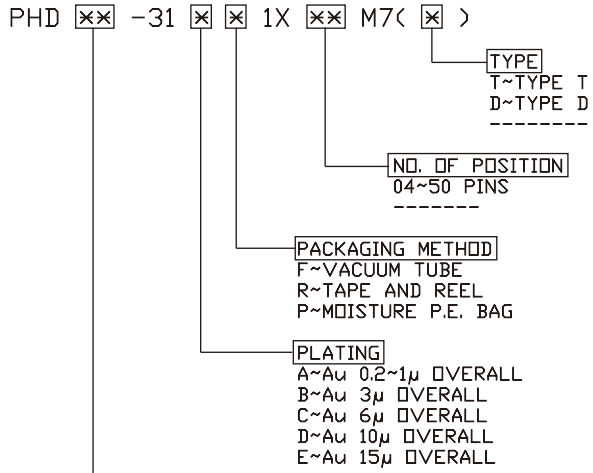

DIMENSION RANDOM
4H~(CT=4.0mm)(CH=2.0mm)(CD=2.5mm)(SL=4.4mm)
6H~(CT=6.0mm)(CH=2.0mm)(CD=2.5mm)(SL=4.4mm)

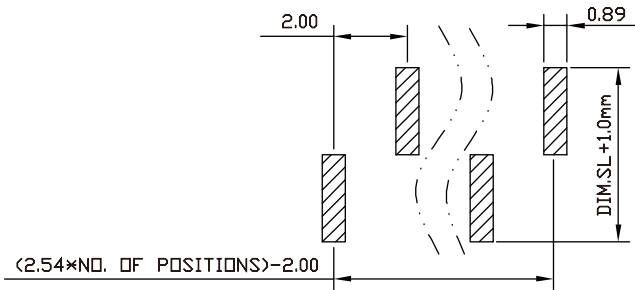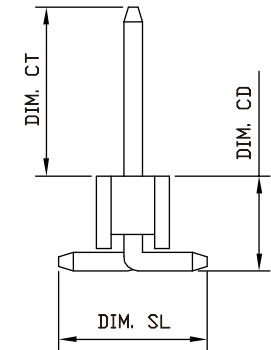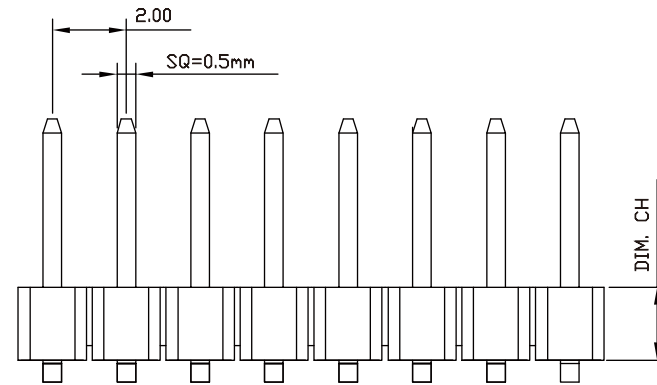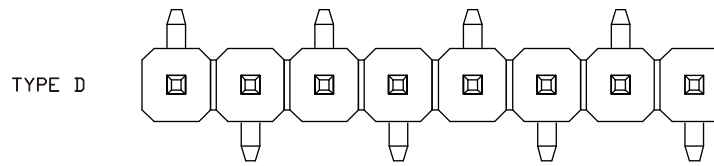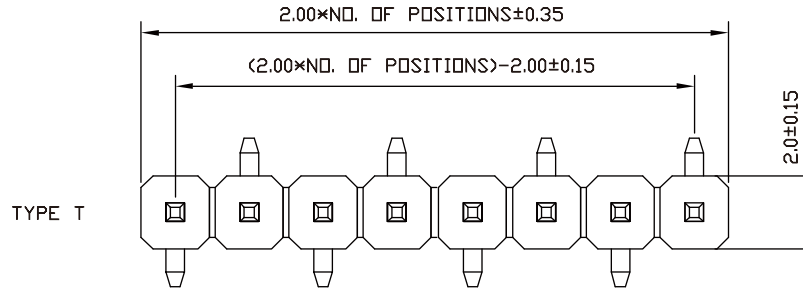

(TYPE T)
RECOMMENDED P.C.B. LAYOUT

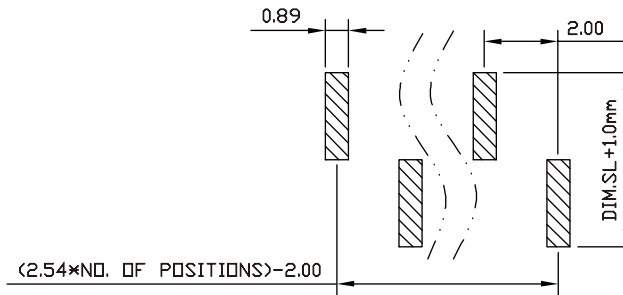

(TYPE D)
RECOMMENDED P.C.B. LAYOUT

QUALITY CONTROL (PENDING ALL MARKS THE SYMBOL IS ▲)	METRIC		WIROS Electronics Int'l CO., Ltd.	
	DRAWER Y. TOMITA		NOTICE OF PROPRIETARY PROPERTY: THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO WIROS ELECTRONICS INTERNATIONAL COMPANY LIMITED AND SHOULD NOT BE USED WITHOUT WIROS'S WRITTEN CONSENT.	
	APPROVER P. TURNEAU			
	DIMENSIONS ARE IN MILLIMETERS TOLERANCES		TITLE	
<input checked="" type="checkbox"/> RoHS COMPLIANT <input type="checkbox"/> HfP <input type="checkbox"/> Pb	X. ±0.25 X.X ±0.20 X.XX ±0.15 X.XXX ±0.10 ANGLES ±2°	2.00 MALE HEADER SINGLE ROW SMT CONNECTOR		
DO NOT SCALE DRAWINGS		PRODUCT NUMBER PHD** - 31**1X**M7(*)		
		THIRD ANGLE PROJECTION		
SIZE A4	REV.	SCALE 1 : 1	SHEET 1 OF 1	