

※NOTES※


MECHANICAL

- ① HOUSING : THERMOPLASTIC NYLON/6T, BLACK, UL94V-0
- ② CONTACT : BRASS, SQ=0.64mm






SPECIFICATION

- ① CURRENT RATING : 3 AMPHERES
- ② WITHSTANDING VOLTAGE : 1000V AC
- ③ INSULATION RESISTANCE : 1000 MEGOHMS MIN.
- ④ CONTACT RESISTANCE : 20 MILLIOHMS MAX.
- ⑤ OPERATING TEMPERATURE : -40°C~+85°C
- ⑥ MAX PROCESSING TEMPERATURE : 260°C FOR 10 SECONDS


ORDER OPTION

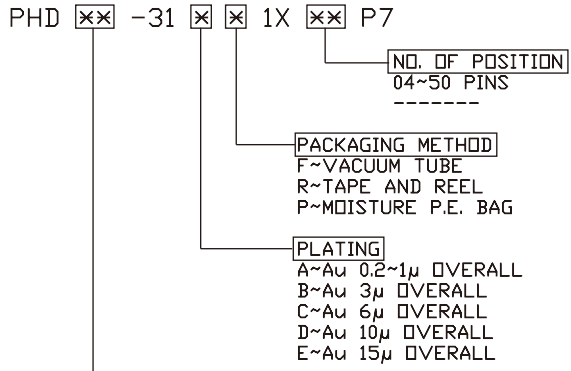

- DIMENSION RANDOM
- 1A~(CT=5.8mm)(CH=2.5mm)(CD=3.2mm)(SL=5.1mm)
 - 2A~(CT=3.5mm)(CH=2.5mm)(CD=3.2mm)(SL=5.1mm)
 - 7C~(CT=4.63mm)(CH=2.0mm)(CD=2.64mm)(SL=5.1mm)
 - 6E~(CT=6.00mm)(CH=2.5mm)(CD=3.3mm)(SL=5.1mm)

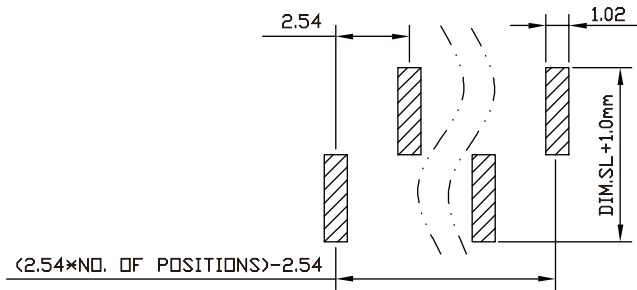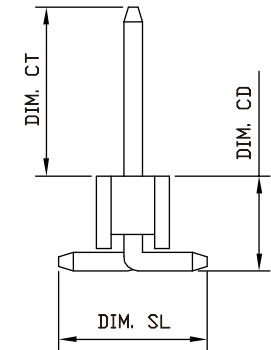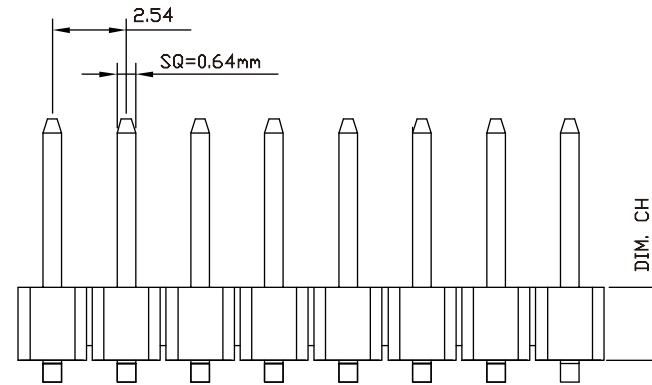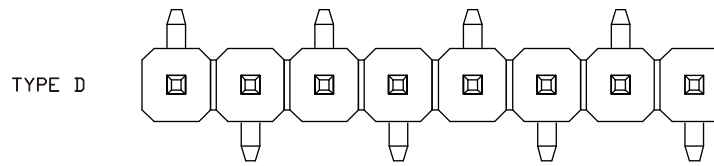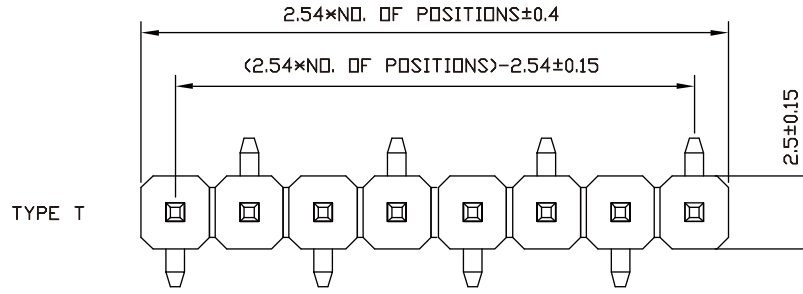

RECOMMENDED P.C.B. LAYOUT

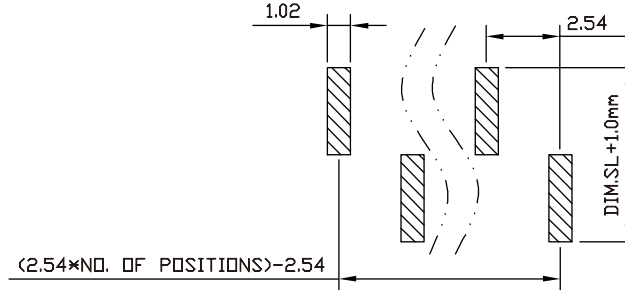

RECOMMENDED P.C.B. LAYOUT

METRIC		WIROS Electronics Int'l CO., Ltd.	
DRAWER Y. TOMITA		NOTICE OF PROPRIETARY PROPERTY: THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO WIROS ELECTRONICS INTERNATIONAL COMPANY LIMITED AND SHOULD NOT BE USED WITHOUT WIROS'S WRITTEN CONSENT.	
APPROVER P. TURNEAU		TITLE 2.54 MALE HEADER SINGLE ROW SMT CONNECTOR	
DIMENSIONS ARE IN MILLIMETERS TOLERANCES		PRODUCT NUMBER PHD** <input type="checkbox"/> -31**1X**P7	
X. ±0.25 X.X ±0.20 X.XX ±0.15 X.XXX ±0.10 ANGLES ±2°		DO NOT SCALE DRAWINGS	
THIRD ANGLE PROJECTION		SCALE 1 : 1	
SIZE A4	REV.	SHEET 1 OF 1	