

※NOTES※

MECHANICAL

- ① HOUSING : THERMOPLASTIC NYLON/6T, BLACK, UL94V-0
- ② CONTACT : BRASS, 0.5×0.2mm

SPECIFICATION

- ① CURRENT RATING : 1.5 AMPHERES
- ② WITHSTANDING VOLTAGE : 500V AC
- ③ INSULATION RESISTANCE : 1000 MEGOHMS MIN.
- ④ CONTACT RESISTANCE : 20 MILLIOHMS MAX.
- ⑤ OPERATING TEMPERATURE : -40°C~+105°C
- ⑥ MAX PROCESSING TEMPERATURE : 260°C FOR 10 SECONDS

ORDER OPTION

RHDK -31 P2X M6





NO. OF POSITION(SINGLE ROW)
04~40 PINS

PLATING

- 0~Au 0.2~1μ ON CONTACT AREA
- 1~Au 3μ ON CONTACT AREA
- 2~Au 6μ ON CONTACT AREA
- 3~Au 10μ ON CONTACT AREA
- 4~Au 15μ ON CONTACT AREA

DIMENSION RANDOM

- 1~(CH=4.3mm)(ST=2.4mm)
- 2~(CH=4.3mm)(ST=3.2mm)

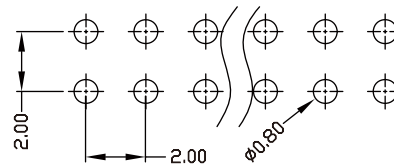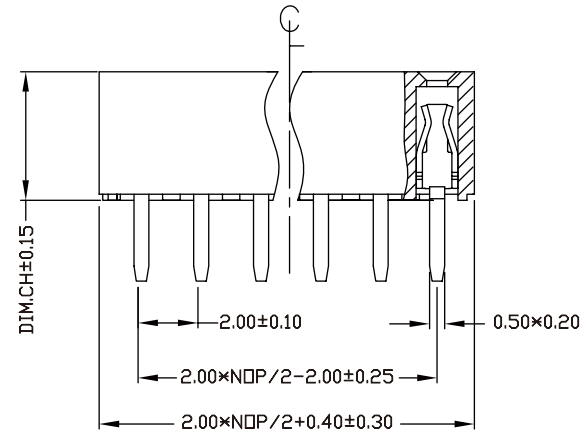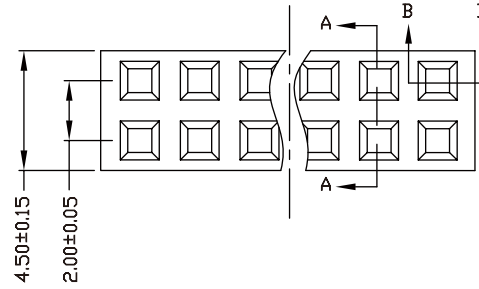

RECOMMENDED P.C.B. LAYOUT

NQP=INQUIRING NUMBER OF POSITIONS

QUALITY CONTROL DIMENSIONS SHALL MARKED THE SYMBOL AS ▲ <input checked="" type="checkbox"/> RoHS COMPLIANT <input type="checkbox"/> HTP <input type="checkbox"/> HTP <input checked="" type="checkbox"/> LEAD-FREE <input checked="" type="checkbox"/> Pb	METRIC	WIROS Electronics Int'l CO., Ltd.	
	DRAWER Y. TOMITA	NOTICE OF PROPRIETARY PROPERTY: THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO WIROS ELECTRONICS INTERNATIONAL COMPANY LIMITED. AND SHOULD NOT BE USED WITHOUT WIROS'S WRITTEN CONSENT.	
	APPROVER P. TURNEAU	DIMENSIONS ARE IN MILLIMETERS TOLERANCES	
	X. ±0.25 X.X ±0.20 X.XX ±0.15 X.XXX ±0.10 ANGLES ±2°	TITLE 2.00 FEMALE HEADER DUAL ROW THT CONNECTOR	
DO NOT SCALE DRAWINGS			PRODUCT NUMBER RHDK×-31×P2X×M6
SIZE A4	REV.	SCALE 1 : 1	SHEET 1 OF 1