

※NOTES※

MECHANICAL

- ① HOUSING : THERMOPLASTIC NYLON 6/T, UL94V-0, BLACK
- ② CONTACT : PHOSPHOR BRONZE, GOLD PLATED

SPECIFICATION

- ① CURRENT RATING : 0.75 AMPERE
- ② WITHSTANDING VOLTAGE : 500V AC
- ③ INSULATION RESISTANCE : 1000MΩ MIN.
- ④ CONTACT RESISTANCE : 30mΩ MAX.
- ⑤ OPERATING TEMPERATURE : -40°C TO +105°C
- ⑥ PROCESSING PEAK-TEMPERATURE :  
230°C FOR 30-60 SECONDS MAX.  
260°C FOR 5 SECONDS MAX.

ORDER OPTION

RHDZ \* -310R2X \*\* G7





POSITION NO.  
02~40 PINS

(CONTACTS TIMES TWO)

DIMENSION SERIES

A~DIM.H=2.0mm, DIM.MS=4.1mm (WITH PLASTIC POLE)  
U~DIM.H=3.2mm, DIM.MS=4.1mm (WITH PLASTIC POLE)  
R~DIM.H=5.0mm, DIM.MS=5.1mm (WITH PLASTIC POLE)

(MOSTLY DEPENDS ON CUSTOMER'S DECISION)

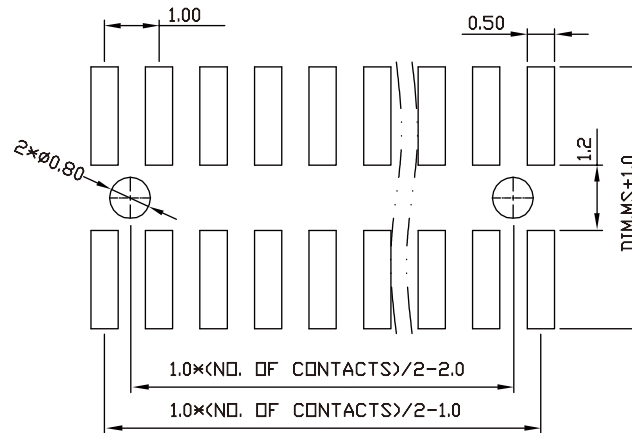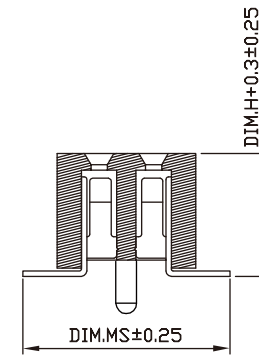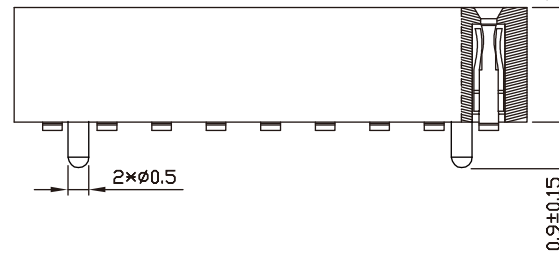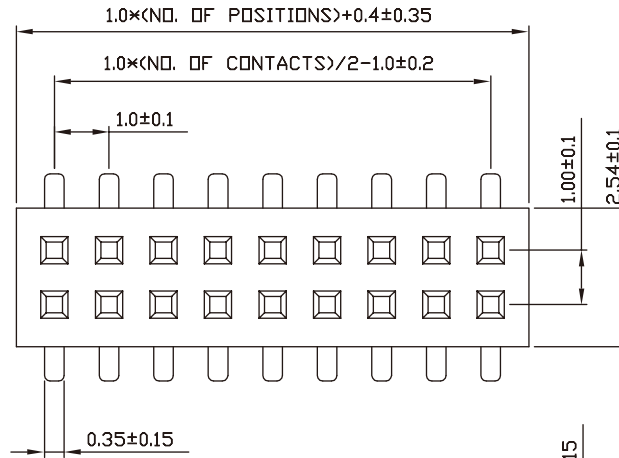

RECOMMENDED P.C.B. LAYOUT  
TOLERANCE  $\pm 0.05$  (TOP VIEW)

<b>METRIC</b>		WIROS Electronics Int'l CO., Ltd.	
DRAWER JJ, PARK		NOTICE OF PROPRIETARY PROPERTY: THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO WIROS ELECTRONICS INTERNATIONAL COMPANY LIMITED. AND SHOULD NOT BE USED WITHOUT WIROS'S WRITTEN CONSENT.	
APPROVER P. TURNEAU		TITLE	
DIMENSIONS ARE IN MILLIMETERS TOLERANCES		1.00mm FEMALE HEADER DUAL ROW, SMD W/PLASTIC POLE CONNECTOR	
X. ----- X.X $\pm 0.35$ X.XX $\pm 0.25$ X.XXX $\pm 0.15$ ANGLES $\pm 1^\circ$			
DO NOT SCALE DRAWINGS		PRODUCT NUMBER	
		RHDZ*-310*2X**G7	
THIRD ANGLE PROJECTION		SCALE	
SIZE A4	REV.	NONE	SHEET 1 OF 1