

※NOTES※

MECHANICAL

- ① HOUSING : THERMOPLASTIC NYLON 6/T, UL94V-0, BLACK
- ② CONTACT : PHOSPHOR BRONZE, GOLD PLATED

SPECIFICATION

- ① CURRENT RATING : 0.75 AMPERE
- ② WITHSTANDING VOLTAGE : 500V AC
- ③ INSULATION RESISTANCE : 1000MΩ MIN.
- ④ CONTACT RESISTANCE : 30mΩ MAX.
- ⑤ OPERATING TEMPERATURE : -40°C TO +105°C
- ⑥ PROCESSING PEAK-TEMPERATURE :
230°C FOR 30-60 SECONDS MAX.
260°C FOR 5 SECONDS MAX.

ORDER OPTION

RHD -310R2X G7





POSITION NO.
02~40 PINS

(CONTACTS TIMES TWO)

DIMENSION SERIES

QA~DIM,H=2.0mm, DIM,MS=4.1mm
 QU~DIM,H=3.2mm, DIM,MS=4.1mm
 QR~DIM,H=5.0mm, DIM,MS=5.1mm

(MOSTLY DEPENDS ON CUSTOMER'S DECISION)

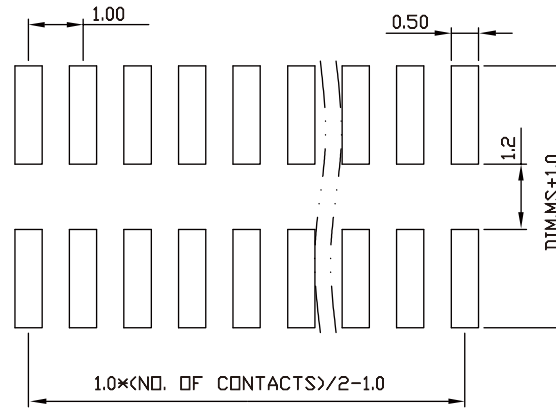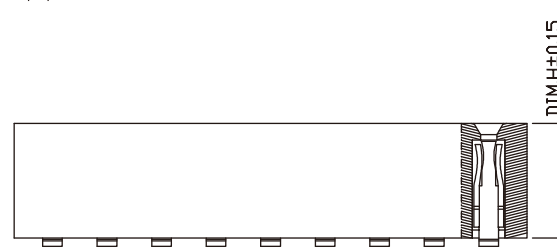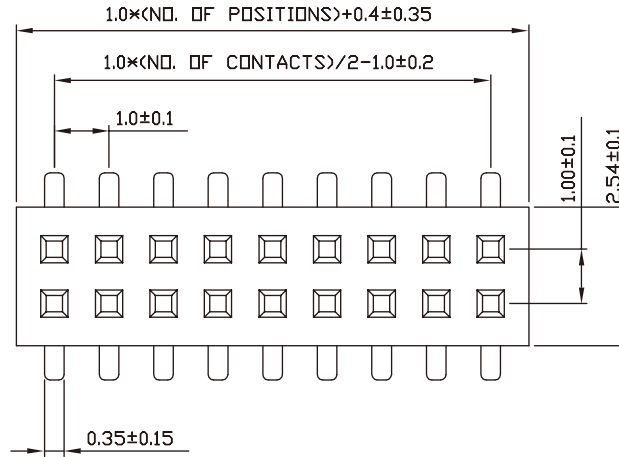

RECOMMENDED P.C.B. LAYOUT
TOLERANCE±0.05 (TOP VIEW)

METRIC		WIROS Electronics Int'l CO., Ltd.	
DRAWER JJ, PARK		NOTICE OF PROPRIETARY PROPERTY: THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO WIROS ELECTRONICS INTERNATIONAL COMPANY LIMITED. AND SHOULD NOT BE USED WITHOUT WIROS'S WRITTEN CONSENT.	
APPROVER P. TURNEAU		TITLE	
DIMENSIONS ARE IN MILLIMETERS TOLERANCES X. ----- X.X ±0.35 X.XX ±0.25 X.XXX ±0.15 ANGLES ±1°		1.00mm FEMALE HEADER DUAL ROW, SMD CONNECTOR	
DO NOT SCALE DRAWINGS THIRD ANGLE PROJECTION		PRODUCT NUMBER	
SIZE A4		RHD <input type="checkbox"/> -310*2X <input type="checkbox"/> G7 SCALE NONE	
REV.		SHEET 1 OF 1	