

* NOTES * (UNLESS OTHERWISE SPECIFIED)





MECHANICAL

- ① HOUSING : THERMOPLASTIC LCP, UL94V-0, COLOR BEIGE
- ② CONTACT : PHOSPHOR BRONZE, TIN PLATED OVER NICKEL
- ③ SOLDER PEG : PHOSPHOR BRONZE, TIN PLATED OVER NICKEL

SPECIFICATION

- ① CURRENT RATING : 0.5 AMPHRE AC/DC
- ② VOLTAGE RATING : 30VDC
- ③ CONTACT RESISTANCE : 20 MILLIOHMS MAX.
- ④ INSULATION RESISTANCE : 100 MEGOHMS MIN.
- ⑤ WITHSTAND VOLTAGE : 200V AC/MINUTE
- ⑥ OPERATING TEMPERATURE : -40°C TO +105°C
- ⑦ IR-REFLOW PEAK-TEMP. : 260±5°C FOR 3±0.5 SECONDS
- ⑧ APPLICABLE WIRE : AWG.#28 TO AWG.#32

*** THIS IS A RoHS-2 RECOGNIZED PRODUCT ***
 *** MATES WITH PWB08 SERIES HOUSING AND TERMINALS ***

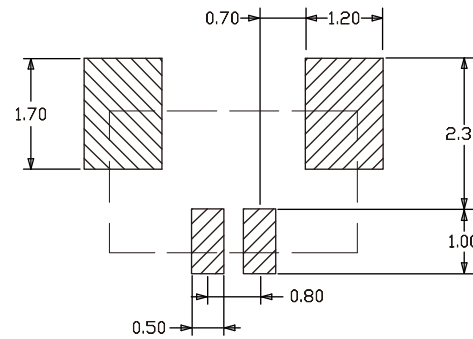

RECOMMENDED P.C.B. LAYOUT
 (TOP VIEW)
 TOLERANCE ±0.05mm

QUALITY CONTROL LINE DIMENSIONS SHALL MARKED THE SYMBOL AS ▲	METRIC		WIROS ELECTRONICS INTERNATIONAL COMPANY LIMITED	
	DRAWER VIVIAN, W		NOTICE OF PROPRIETARY PROPERTY THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO WIROS ELECTRONICS INTERNATIONAL COMPANY LIMITED AND SHOULD NOT BE USED WITHOUT WRITTEN CONSENT FROM WIROS.	
APPROVER STAR, H		DIMENSIONS ARE IN MILLIMETERS TOLERANCES		TITLE 0.80 2P WIRE TO BOARD SIDE ENTRY SMD CONNECTOR
RoHS COMPLIANT HfP LEAD FREE		X. ----- X.X ±0.25 X.XX ±0.15 X.XXX ±0.10 ANGLES ±3°		PRODUCT NUMBER RWBC8-12JR002F3
DO NOT SCALE DRAWINGS		THIRD ANGLE PROJECTION		
SIZE A4		REV.		SCALE NONE
			SHEET 1 OF 1	