

NOTES

- 1 TERMINAL : BRASS
- 2 FINISH : NICKEL/GOLD PLATING OVERALL
- 3 OPERATING TEMPERATURE : -40°C TO +105°C

ORDER OPTION

1024CUR020- ** - ** - ** - ***


PLATING

SN1~NICKEL 80~120μ OVERALL
 SN2~NICKEL 160~180μ OVERALL
 AU0~GOLD 0.2~1μ OVERALL
 AU3~GOLD 10μ OVERALL

DIMENSION A & B & C


(CHECK AVAILABLE DIMENSION AS BELOW TABLE)
 PLEASE CONTACT OUR SALES FOR CUSTOMIZE DIMENSION.

WIRES P/N	DIM.A	DIM.B	DIM.C
1024CUR020-16-0.5-2-***	16	0.5	2.0
1024CUR020-20-0.5-2-***	20	0.5	2.0
1024CUR020-23-0.5-2-***	23	0.5	2.0
1024CUR020-26-0.5-2-***	26	0.5	2.0
1024CUR020-15-1-2.3-***	15	1.0	2.3
1024CUR020-20-1-2.3-***	20	1.0	2.3
1024CUR020-30-2-3-***	30	2.0	3.0

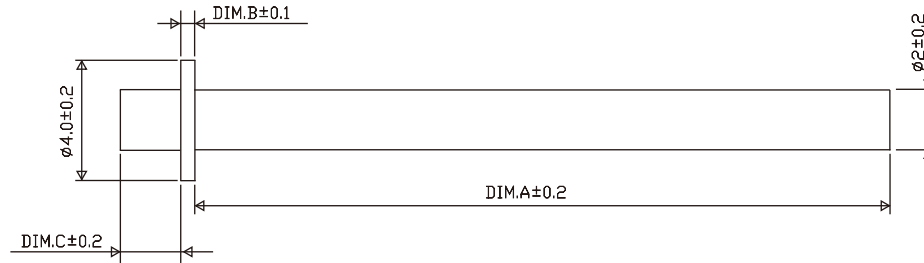

PACKAGING METHOD

- 1. 200~400PCS PER MOISTURE P.E. BAG
- 2. 8,000~10,000PCS PER CARTON



RECOMMENDED P.C.B. LAYOUT
 TOLERANCE ± 0.05mm

QUALITY CONTROL LINE DIMENSION SHALL MARKED THE SYMBOL AS ▲ <input checked="" type="checkbox"/> RoHS COMPLIANT <input checked="" type="checkbox"/> HIF <input checked="" type="checkbox"/> LEAD FREE <input checked="" type="checkbox"/> P/B	METRIC	WIROS Electronics Int'l CO., Ltd.	
	DRAWER C, WU	NOTICE OF PROPRIETARY PROPERTY: THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO WIROS ELECTRONICS INTERNATIONAL COMPANY LIMITED. AND SHOULD NOT BE USED WITHOUT WIROS'S WRITTEN CONSENT.	
	APPROVER PHIL, CHEN	DIMENSIONS ARE IN MILLIMETERS TOLERANCES	
	X. ±0.30 X.X ±0.25 X.XX ±0.15 X.XXX ±0.10 ANGLES ±2°	TITLE CYLINDRICAL SOLID BRASS PIN	
DO NOT SCALE DRAWINGS			PRODUCT NUMBER 1024CUR020-**-**-**-***
THIRD ANGLE PROJECTION			SCALE 1 : 2
SIZE A4	REV.	SHEET 1 OF 1	